

T & B Channels

Your choice of inverted or flush.

Closer Reinforcement

14 GAUGE BOX TYPE


Every door has a double sided, 14ga, closer reinforcement box at no up charge.

As the oldest Steel Door Institute Member, our customers have an advantage on specification work, where Steel Door Institute Members are required.

Non Handed

WED GAUGE HINGE
FILLER PLATE
NO. 10P-433
.134"
.218"

Standard features: N Series Door

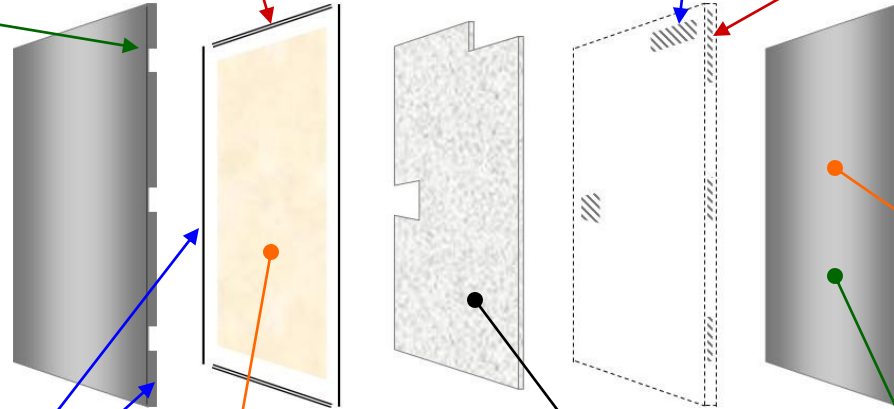

Hinge Reinforcement

Because the top hinge carries most of the door weight, we use extra long hinge reinforcements on the top hinge.

All N Series doors can be upgraded to NVS continuously welded doors.

Our PRIMER is an electrostatic paint. This provides far superior results than standard baked on paint systems. A wide range of colors are also available with this paint process.

Standard Edge Seam

Mechanically Interlocking Edge

Glue System

We use a hot melt roller system to get 100% coverage of the door core & increase overall strength.

Roller Coverage VS Drip Coverage

Core

Mesker doors come insulated with polystyrene as a standard.

Mesker uses American recycled steel. The Steel Recycled Content Value = 63 1/2%

